

## 3135 Wipe-On

Primary Applicator

Model 3135


## 3135 Wipe-On Specifications

The Label-Aire® Model 3135 makes labeling easier and faster...keeping you many steps ahead of your competition.

The Model 3135 Wipe-On labeler delivers on its promise of speed, accuracy, and ease of use. And that translates into lower operating costs and increased productivity for your business.

Speeds up to 3,500 inches (8,890 cm) of web per minute make the Model 3135 an ideal choice for demanding applications requiring high speed and precision. Advanced features include Automatic Speed Following (ASF) which allows product surface profiling, ensuring wrinkle-free labeling on even the most difficult product shapes and label materials (optional encoder required). Zero Downtime Labeling allows your production to continue without costly interruptions. Product/label queuing and missing label compensation virtually eliminate unlabeled products or missing lot and expiration codes.

Put this high-speed wipe-on pressure-sensitive technology to work for you all day, every day. The Model 3135 Wipe-On labeler is built to meticulous quality standards and designed to withstand the most intense operation.

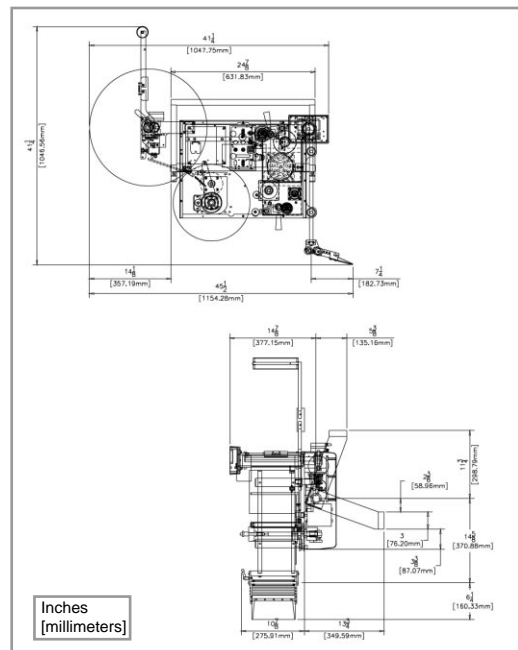

### Dimensions:

Height: 26.4" (670 mm)  
Length: 41.25" (1,048 mm)  
Width: 24.6" (625 mm)

### Weight:

Approx. 180 lbs. (84 kg)

### Standard Label Dimensions:

Label Width: Up to 7.13" (181 mm)  
Label Length: 5" (13 mm)

### Label Packaging:

20" (508 mm) O.D. rolls std. on  
3" (76 mm) I.D. cores  
with optional 6" (152 mm) core

### Dispense Speed:

Up to 3,500" (8,890 cm) of web per minute

### Label Placement Accuracy:

Up to +/- 1/64" (.4 mm)

### Electrical:

115 Volts AC 60 Hz 3 Amps.  
220 Volts AC 50 Hz optional

### Options:

Encoder kit for Automatic Speed Following  
6" (152 mm) label core adapter  
Hot stamp imprinter  
Model 2700 T-Base stand  
Strobe signals for "low label" and  
"out of labels"

**Consult factory for additional options.**

## 3135 Wipe-On Advanced Features

<b>Automatic setup</b>	Includes multiple programmable label pages for easy changeovers to different label sizes.
<b>Stepper motor drive</b>	For precise starting/stopping, increased reliability, wider range speed variability, and lower maintenance.
<b>R3 digital display</b>	Select from five languages (English, French, German, Italian, Spanish), domestic or CE (European) configurations, standard/metric unit display and detailed alarm messages. Can rotate 360°.
<b>Automatic Speed Following (ASF)</b>	Labels are accurately applied even through extreme changes in product line speed.
<b>Quick-action collapsible rewind</b>	Allows easy removal of scrap liner.



### Headquarters

550 Burning Tree Road  
Fullerton, CA 92833 USA

o 714.441.0700  
f 714.526.0300  
e info@label-aire.com  
w www.label-aire.com

### Europe

Sjaellandsvej 27A  
DK-9500 Hobro, Denmark

o +45 9657 0063  
f +45 9657 0064  
e info@label-aire.com  
w www.label-aire.com

### Distributed by:

U. S. TAPE & LABEL  
2092 WESTPORT CENTER DRIVE  
ST. LOUIS, MO 63146  
(800) 569-1906