


3138

 LABEL-AIRE®

Model 3138 Printer Applicator

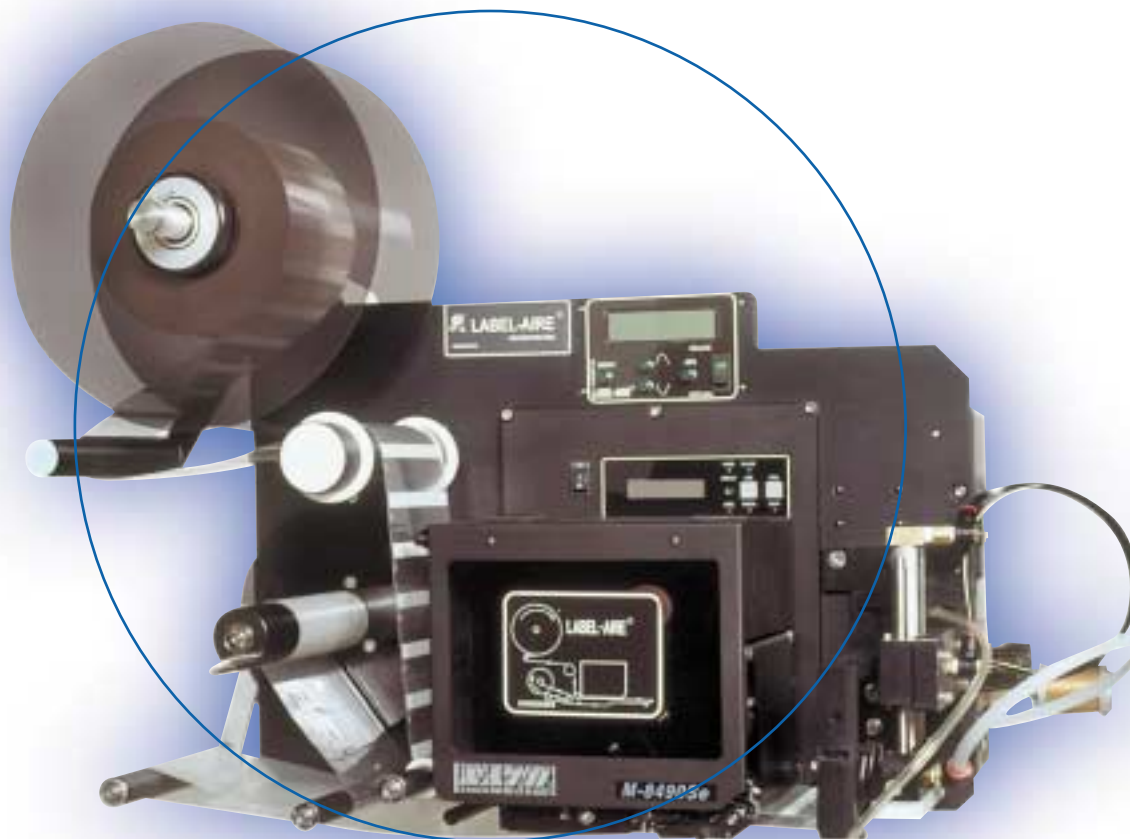

precision

LABEL-AIRE®... LABELING SOLUTIONS THAT APPLY™

# Model 3138 Printer Applicator

The Model 3138's list of advanced features make this Label-Aire®'s best printer applicator for tough labeling jobs.

The Model 3138 is Label-Aire's most advanced printer applicator featuring enhanced **two-line digital display with full error messaging**, **velocity compensation** with optional **encoder** which results in accurate label placement through changes in product velocity, and **multi-page memory** (for saving setup parameters). All these handy features greatly simplify setup and changeovers. The new 3138 is just as tough as it is advanced. Its rugged stainless steel and anodized aluminum construction is corrosion resistant providing **long-lasting durability** and **maintenance-free operation** in the most hostile environments.

The 3138 is built to handle your most demanding labeling applications with ease and reliability.

- **Heavy duty air cylinder** for 24/7 label application.
- **Velocity compensation** with **optional encoder** for accurate label placement through changes in product velocity.
- **Enhanced two-line digital display with full error messaging** for added convenience.
- Compatible with any O.E.M. printer on the market.
- Standard 12" (305 mm) unwind.
- Available in either **domestic** or **CE** (European) configurations.
- Standard "end of label/ribbon" and "low label/ribbon" signals with strobes.
- Applies labels to the top, side, or bottom of products for added versatility.
- Available in a **variety of stroke lengths**.



550 Burning Tree Road  
Fullerton, CA 92833 USA  
v: 714-441-0700 f: 714-526-0300



Sjaellandsvej 27 A  
Hobro, DK-9500 Denmark  
v: 45 96 57 00 63 f: 45 96 57 00 64

e: info@label-aire.com  
i: www.label-aire.com

Distributed by:

U. S. TAPE & LABEL  
2092 WESTPORT CENTER DRIVE  
ST. LOUIS, MO 63146  
(800) 569-1906

IMPAXX  
THE COMPLETE PACKAGE  
MACHINE SYSTEMS

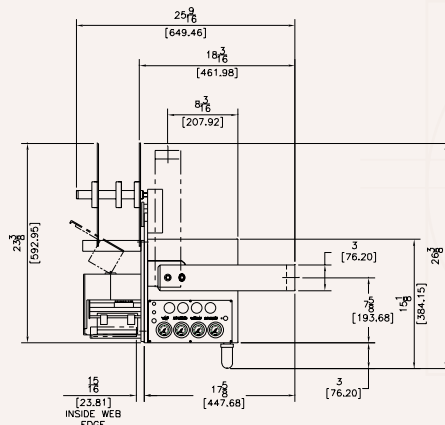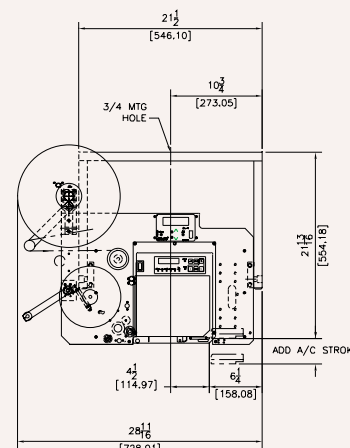

## S P E C S

### Dimensions:

Height: 23.3" (592 mm)  
Length: 28.7" (728 mm)  
Width: 25.6" (650 mm)

### Weight:

165 lbs. (75 kg)

### Standard Label Dimensions:

Label Width: Up to 7.2" (183 mm)  
Label Length: Up to 7" (178 mm)  
(Printer dependent)

### Dispense Speed:

Up to 12" (305 mm) per second  
depending on printer and label  
size

### Label Placement Accuracy:

+/- 1/32" (.8 mm)

### Electrical:

115 Volts AC 60 Hz, 5 Amps.  
220 Volts AC, 50 Hz, 5 Amps.

### Air:

4 cfm at 90 psi for most  
applications

### Options:

All O.E.M. print engines  
17" (432 mm) powered unwind  
Label on pad detection  
(Consult factory for additional  
options.)

Label-Aire also provides a full range of rotary & inline systems, label applicators, printer applicators, and custom systems to meet your toughest labeling requirements.